

## PRODUCT INFORMATION/ TECHNICAL DATASHEET

### *VersaLite Stone®* LITE PANELS

Real Stone Overlay (Slate and Quartzite) with Clear Resin Backing

**VersaLite Stone® Lite Panels** can be backlit for stunning, colorful effects and are engineered with a thin layer of real natural stone laminated to a translucent fiberglass/polyester resin backing. Lightweight and clear backing allows light to pass through for unlimited design possibilities utilizing the texture, natural color and beauty of stone.


**SIZES:** Standard size is 24" x 48" (special sizes are also available on request).

**THICKNESS:**

1.6-2.10mm (depending upon the stone).

**WEIGHT:**

1900-2400 grams per square meter or .40 - .50 lbs. SF (depending upon the stone).

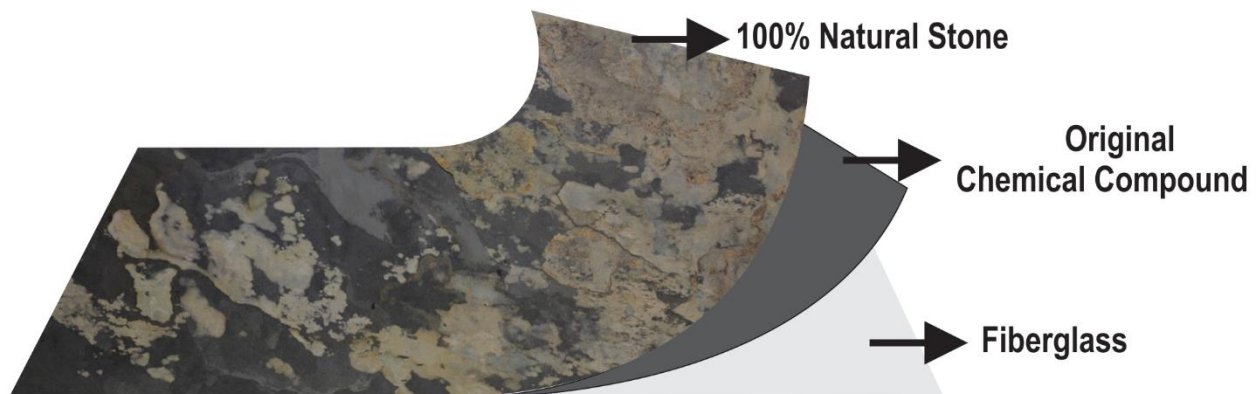

**COMPOSITION:**

**VersaLite Stone® Lite Panel** is natural stone veneer laminated to a fiberglass/polyester resin substrate.

**APPLICATION:**

Translucent stone panels by **VersaLite Stone® Lite Panels** are suitable for many applications, and backlighting ensures they will be brilliant and radiant focal points regardless of where they are placed on Ceilings, Columns, Walls, Partitions, etc. (Not suitable for floors or heavy use countertops)

**TOOLS:**

Standard tools required to work with natural stones can be used for application.

**SEALING:**

Requires sealers for stain and scratch protection. The sealers recommended are listed on this document. It is best to pre-seal VersaLite Stone® Lite sheets prior to installation. This protects and seals the face from scuffing, adhesives and grout during installation and handling.

**VARIATIONS:**

Since VersaLite Stone® Lite is a natural product *DESIGNED BY NATURE*, color and texture variances are not defects within the material, but are inherent to it and part of the natural beauty of quarried materials. These materials cannot be guaranteed to match dye-lot to dye-lot, so it is recommended that orders take into account future maintenance or re-fit possibilities.

**STORAGE:**

Translucent sheets should be stored flat in a clean environment.

**PRECAUTIONS:**

Precautions must be taken when working with VersaLite Stone® Lite due to the fiberglass composition of the backing materials. ALWAYS use the proper gloves, goggles, and dust mask when working with VersaLite Stone® Lite. Industry standards recommend a NIOSH/MSHA approved respirator for this type of material. When using a saw ALWAYS be sure to take proper precautions to cover skin and eyes from fiberglass dust. When cutting VersaLite Stone® Lite with saws, grinders, or sanders, ALWAYS properly filter and exhaust equipment.

**AVOID BREATHING SILICA DUST.** This product when cut, drilled, or abraded produces dust containing Free Silica which may cause cancer or delayed lung injury (Silicosis) if inhaled. Work outdoors, in a well ventilated area, or use mechanical ventilation. Please wear safety glasses and a dust mask. If working in dusty areas or where airborne dust exceeds PEL wear NIOSH/MSHA approved respirators. This product contains one or more chemicals known to the State of California to cause cancer.

**TESTING STANDARDS:**

ASTM C-121: Water absorption in unsealed surface +2.50%.

**THERMAL EXPANSION:**

0.5-0.8mm by temperature variations up to 90° Centigrade.

**FORMALDEHYDE:**

FREE

**FIRST AID MEASURES:**

	(Under normal condition)
Inhalation:	no specific measure to be taken
Skin Contact:	no specific measure to be taken
Eye Contact:	no specific measure to be taken
Ingestion:	no specific measure to be taken

**MEASURES IN CASE OF FIRE:**

Suitable extinguishing media: dry extinguishing media, foam, CO<sup>2</sup>, water spray risk by gas: in case of fire carbon monoxide and carbon dioxide can be produced special protecting equipment: no special measurements necessary.

**MEASURES IN CASE OF ACCIDENTAL SPILLAGE:**

Not applicable.

**EXPOSITION RESTRICTION AND PERSONAL PROTECTING EQUIPMENT:**

No specific measures – while processing the material we recommend wearing safety glasses.

**TOXICOLOGICAL INFORMATION:**

No toxic reaction known under normal conditions.

**ECOLOGICAL INFORMATION:**

For transportation, storage, normal use, no toxicological effect known.

**DISPOSAL CONSIDERATIONS:**

Product can be deposited with normal waste according to local restrictions.

**TRANSPORTATION:**

Sheets are packed into wooden pallet or box and can be transported by LTL, Air or Sea.

Adhesives for VersaLite Stone® Lite Panel Installations			
	Glass or Plexiglass	Wood or Metal Frames	
Interior	Clear Silicone	Silicone	Sizes Available
Sealers for VersaLite Stone® Lite Panels			
Tile Doctor Natural Protect, Solvent Based Sealer for Large Projects			Gallon
Tile Doctor Advanced Hydro Protect, Premium Water Based Sealer			Pint / Quart / Gallon
Tile Doctor Advanced Hybrid Sealer, Penetrating Sealer No-Gloss			Pint /Quart
Tile Doctor Advanced Green Enhance and Protect, Semi- Gloss Enhancer			Pint / Quart / Gallon
Cleaners			
Tile Doctor Advanced Tile and Stone Cleaner, PH Neutral Cleaner Concentrate			Quart/Gallon

Visit [TileDoctor.com](http://TileDoctor.com) for more information on sealers and adhesives.



*VersaLite Stone®*

### LIMITED WARRANTY

**VersaLite Stone®** products are warranted to be free from defects in materials and workmanship at the time of shipment. Installation constitutes acceptance of the Product. Any such defects must be reported within ten (10) days of date of delivery. During this warranty period we will repair, or at our option, replace free of charge, such merchandise as shall prove to be defective. THIS WARRANTY DOES NOT APPLY TO DAMAGE RESULTING FROM ACCIDENT, ALTERATION, MISUSE, TAMPERING, NEGLIGENCE, OR ABUSE. INCIDENTAL AND CONSEQUENTIAL DAMAGES ARE SPECIFICALLY DISCLAIMED. ALL OTHER WARRANTIES (INCLUDING ANY WARRANTY OF MERCHANTABILITY OF FITNESS FOR ANY PARTICULAR PURPOSE) ARE HEREBY EXCLUDED. THE FOREGOING SHALL CONSTITUTE THE SOLE REMEDY OF THE CUSTOMER.

Concrete and masonry substrates must be at least 28 days old. Hydrostatic pressure conditions and vapor transmission cannot exceed 3 lbs. per 1,000 sq. ft. (1,36 kg per 92,9 m<sup>2</sup>) per 24 hours using a calcium chloride test (reference ASTM). NOTICE: Before using, user shall determine the suitability of the product for its intended use and user alone assumes all risks and liability whatsoever in connection therewith. ANY CLAIM SHALL BE DEEMED WAIVED UNLESS MADE IN WRITING TO US WITHIN TEN (10) DAYS FROM DATE IT WAS, OR SHOULD HAVE BEEN DISCOVERED.

**The Tile Doctor**  
1395 South Marietta Pkwy SE  
Bldg. 200, Suite 222  
Marietta, GA 30067  
770-447-0061  
Toll-Free: 877-TileDoc  
Visit us on the web at: [www.TileDoctor.com](http://www.TileDoctor.com)

